

PDTV 4203A

42" Plasma TV and Monitor

A complete home theater in a 4" thin package

Includes two 181 channel tuners, PIP, split screen and 6 channel surround-sound system.



Luce models are ideal as stand-alone super-thin TV's for the bedroom, kitchen, office, bathroom, yacht or plane, plus as high-resolution PC or Mac monitors...all in one!

2 Integrated cable TV Tuners with PIP, split screen, and 6 channel surround-sound system

Unlike competitors' plasma monitors, *the PDTV-4203A is a complete stand-alone TV*, no additional components needed* and can display any combination of 2 sources at once!

W-VGA (853 x 480) native resolution with PC/Mac input

The PDTV-4203A may serve as a high resolution computer monitor as well as an HDTV monitor with internal scaling up to 1280 x 1024 resolution.

16:9 wide aspect ratio screen format

Ideal for DVD, DTV and HDTV source material

Integrated aspect ratio and scan rate scaler

Allows for HDTV viewing. Will fill entire screen in correct format with ideal image quality up to 1280 x 1024 resolution, or 480p, 720p, or 1080i.

Super high contrast ratio

Optical glass front filter and integrated CCF™ technology provide superior blacks, whiter whites and truer color quality.

High brightness and wide viewing angle with anti-glare coating

Allows for viewing in strong light and from almost any angle in the room with decreased glare or reflections.

Real aluminum cabinet

High tech and high style design fits well in any décor, anywhere in the room.




Luce,™ a product of
In-Formation Display Technologies, LLC.
Telephone: 954.421.5330 Facsimile: 954.421.0133
See the world's first full family (10.4 – 50 in.)
of flat-panel TV's at www.lucetv.com

* Color-matched speakers optional
CCF, capsulated color filter technology is a trademark of NEC Technologies

PDTV 4203A

Technical specifications

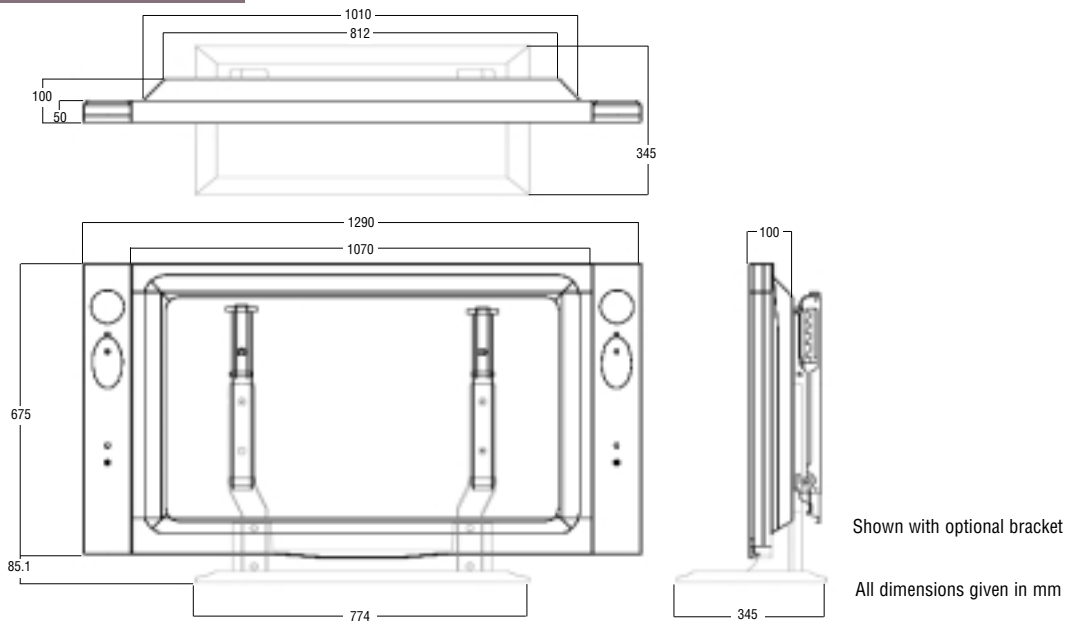

Model	PDTV-4203A
Screen Size	42"
Resolution	853 x 480 native (1280 x 1024 / 480p, 720p, 1080i)
Contrast Ratio	550 : 1
Brightness	500 cd/m²
Viewing Angle	R 90°, L 90°, U 90°, D 90°
Frequency Support	H 15-48 kHz, V 47-72 kHz
Sound	6 x 7 watts per channel integrated surround-sound amplifier (speakers optional)
Case Colors	aluminum
Plug & Play	yes
Power Use	110-240V, 50/60hz
Operation Environment	temperature 10-40°C, recommended humidity 15-85% RH, 7500 altitude
TV Tuner	with 2 tuners, picture in picture, split screen, freeze, zoom
RF Tuner Input	choice of NTSC, PAL (M, N, BG, I) or SECAM tuners
Video Input	component, S Video, composite, D-15, RS-232
Audio In / Out	RCA stereo in (video 1), RCA stereo in (PC) / 1 RCA stereo out, 6 x 7 wpc hi-level speaker terminal
Certification	CE Mark, TUV, FCC approved
Dimensions (WHD)	42.13" x 26" x 3.92"
Surface	optical glass filter with anit-glare etched surface
Unit Weight	75 lbs
Menu	Input select / PC graphics / TV / CATV / Composite video / S-Video / Favorite channel memory Screen control / Brightness / Contrast / Color / Hue / HV position / Volume adjust System setting / PIP / Split screen / Aspect ratio / Audio adjustment, color temperature
Included Accessories	IR remote control, VGA cable, power cable, manual

PDTV 4203A

Optional Accessories matching hi-power speakers, universal remote, ceiling mount, tilting wall mount, flat wall mount, table stand
All specifications are subject to change without notice